





Four-point contact ball bearing Ungeared



无齿式 Ungeared	外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter				结构尺寸 Structure dimensions					额定负荷 Basic load ratings	质量 Mass	
	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	Coa 10 ⁴ N	kg
010-30-500.**	602	398	80	566	434	20	18	498.5	501.5	70	10	4	M10×1	129	75.8
	602	398	80	566	434	20	18	498.5	501.5	70	10	4	M10×1	129	75.8
010-30-560.**	662	458	80	626	494	20	18	558.5	561.5	70	10	4	M10×1	144	94
	662	458	80	626	494	20	18	558.5	561.5	70	10	4	M10×1	144	94
010-30-630.**	732	528	80	696	564	24	18	628.5	631.5	70	10	4	M10×1	187	110
	732	528	80	696	564	24	18	628.5	631.5	70	10	4	M10×1	187	110
010-30-710.**	812	608	80	776	644	24	18	708.5	711.5	70	10	4	M10×1	212	120
	812	608	80	776	644	24	18	708.5	711.5	70	10	4	M10×1	212	120
010-40-800.**	922	678	100	878	722	30	22	798.5	801.5	90	10	6	M10×1	313	256
	922	678	100	878	722	30	22	798.5	801.5	90	10	6	M10×1	313	256
010-40-900.**	1022	778	100	978	822	30	22	898.5	901.5	90	10	6	M10×1	355	240
	1022	778	100	978	822	30	22	898.5	901.5	90	10	6	M10×1	355	240
010-40-1000.**	1122	878	100	1078	922	36	22	998.5	1002	90	10	6	M10×1	394	305
	1122	878	100	1078	922	36	22	998.5	1002	90	10	6	M10×1	394	305
010-40-1120.**	1242	998	100	1198	1042	36	22	1118	1122	90	10	6	M10×1	443	300
	1242	998	100	1198	1042	36	22	1118	1122	90	10	6	M10×1	443	300
010-45-1250.**	1390	1110	110	1337	1163	40	26	1248	1252	100	10	6	M10×1	554	420
	1390	1110	110	1337	1163	40	26	1248	1252	100	10	6	M10×1	554	420
010-45-1400.**	1540	1260	110	1487	1313	40	26	1398	1402	100	10	6	M10×1	617	480
	1540	1260	110	1487	1313	40	26	1398	1402	100	10	6	M10×1	617	480
010-45-1600.**	1740	1460	110	1687	1513	45	26	1598	1602	100	10	8	M10×1	702	550
	1740	1460	110	1687	1513	45	26	1598	1602	100	10	8	M10×1	702	550
010-45-1800.**	1940	1660	110	1887	1713	45	26	1798	1802	100	10	8	M10×1	793	610
	1940	1660	110	1887	1713	45	26	1798	1802	100	10	8	M10×1	793	610
010-60-2000.**	2178	1825	144	2110	1891	48	33	1998	2002	132	12	8	M10×1	1210	1100
	2178	1825	144	2110	1891	48	33	1998	2002	132	12	8	M10×1	1210	1100

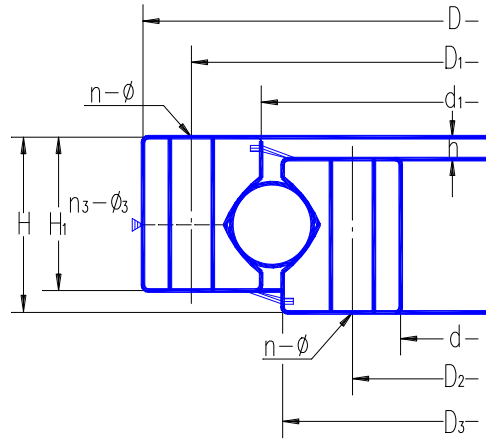

Four-point contact ball bearing Ungeared

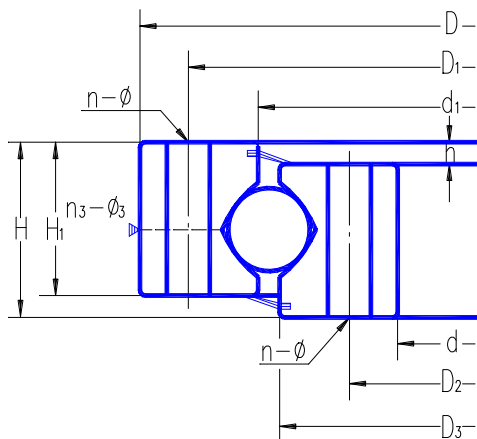

无齿式 Ungeared	外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter				结构尺寸 Structure dimensions					额定负荷 Basic load ratings	质量 Mass	
	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3		Coa 10 ⁴ N
010-60-2240.**	2418	2065	144	2350	2131	48	33	2238	2243	132	12	8	M10×1	1350	1250
	2418	2065	144	2350	2131	48	33	2238	2243	132	12	8	M10×1	1350	1250
010-60-2500.**	2678	2325	144	2610	2391	56	33	2498	2503	132	12	8	M10×1	1500	1400
	2678	2325	144	2610	2391	56	33	2498	2503	132	12	8	M10×1	1500	1400
010-60-2800.**	2978	2625	144	2910	2691	56	33	2798	2803	132	12	8	M10×1	1680	1600
	2978	2625	144	2910	2691	56	33	2798	2803	132	12	8	M10×1	1680	1600
010-75-3150.**	3376	2922	174	3286	3014	56	45	3148	3153	162	12	8	M10×1	2380	2800
	3376	2922	174	3286	3014	56	45	3148	3153	162	12	8	M10×1	2380	2800
010-75-3550.**	3776	3322	174	3686	3414	56	45	3548	3553	162	12	8	M10×1	2690	3200
	3776	3322	174	3686	3414	56	45	3548	3553	162	12	8	M10×1	2690	3200
010-75-4000.**	4226	3772	174	4136	3864	60	45	3998	4003	162	12	10	M10×1	3020	3600
	4226	3772	174	4136	3864	60	45	3998	4003	162	12	10	M10×1	3020	3600
010-75-4500.**	4726	4272	174	4636	4364	60	45	4498	4503	162	12	10	M10×1	3410	4000
	4726	4272	174	4636	4364	60	45	4498	4503	162	12	10	M10×1	3410	4000